



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

01113885.6

Der Präsident des Europäischen Patentamts:
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

03/07/01

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.
Application no
Demande n° 01113885.6

Anmeldetag
Date of filing
Date de dépôt 07/06/01

Anmelder
Applicant(s)
Demandeur(s)
Agilent Technologies Inc. a Delaware Corporation
Palo Alto, CA 94303
UNITED STATES OF AMERICA

Bezeichnung der Erfindung
Title of the invention
Titre de l'invention

Determination of at least one optical parameter of an optical signal

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat
State
Pays

Tag
Date
Date


Aktenzeichen
File no
Numéro de dépôt

Internationale Patentklassifikation
International Patent classification
Classification internationale des brevets

/

Am Anmeldetag benannte Vertragsstaaten
Contracting states designated at date of filing AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt

Bemerkungen
Remarks
Remarques



Agilent Technologies

EPO-Munich
52

June 5, 2001

Our Ref.: 20010465

07. Juni 2001

DETERMINATION OF AT LEAST ONE OPTICAL PARAMETER OF AN OPTICAL SIGNAL

BACKGROUND OF THE INVENTION

5 The present invention relates to the determination of at least one optical parameter of an optical signal.

The determination of properties of optical components has become quite important in the last few years. However, polarization effects as polarization mode dispersion (PMD) or polarization dependent loss (PDL) influence the quality of the signal transmission because the transmission rates of optical communication links were continuously enhanced. Therefore, the measurement of PMD and of PDL are well-known when characterizing optical components (see L. E. Nelson, R. M. Jopson, H. Kogelnik, "Influence of Measurement Parameters on Polarization Mode Dispersion Measurements using the Signal Delay Method", Proc. ECOC 2000, Munich, Germany Vol. I (3.4.4), pp. 143-144 (2000); and A. Galtarossa, L. Palmieri, M. Schiano, T. Tambosso, "Improving the Accuracy of the Wavelength-Scanning Technique for PMD Measurements", IEEE Photonics Technology Letters 12(2), pp. 184-186 (2000)). Moreover the precise measurement of polarization and the degree of polarization (DOP) are useful for compensation of PMD (see N. Kikuchi, S. Sasaki, "Polarization-Mode Dispersion (PMD) Detection Sensitivity of Degree of Polarization Method for PMD Compensation", Proc. ECOC'99, Nice, France Vol. II (WeA1.3) pp. 8-9 (1999); and H. Rosenfeldt, R. Ulrich, U. Feiste, R. Ludwig, H.G. Weber, A. Ehrhardt, "PMD compensation in 10Gbit-s NRZ field experiment using polarimetric error signal", Electronics Letters 36(5), pp. 448-449 (2000)).

25 However, polarimeters of the prior art require a lot of beam splitters, polarizers and detectors, thereby negatively influencing the production costs of such polarimeters. In addition it is necessary to precisely adjust such components

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

with respect to each other. An example of a polarimeter of the prior art is shown in Dennis Derickson "Fiber optic, Test and Measurement", Prentice Hall PTR, Upper Saddle River, New Jersey 07458, pp. 231-232 (1998). The polarimeter shown in this publication uses one four-way beam splitter, three linear
5 polarizers, one quarter-wave plate and four detectors to evaluate the Stokes parameters.

SUMMARY OF THE INVENTION

Therefore, it is an object of the invention to provide improved determination of at least one optical parameter of an optical signal. The object is solved by the
10 independent claims.

One of the main features of the present invention is the combination of two steps, both dependent on the position in the beam. The first position dependent step is the manipulation of the beam, wherein the manipulation having polarization properties, the properties being dependent of the position in the
15 beam laterally with respect to a direction of propagation of the beam during this manipulation. This is combined with the second step of detecting intensities in at least three, preferably four, parts of the beam in their dependency of the position in the beam laterally with respect to a direction of propagation of the beam during this detection. Based on this combination it is possible to derive
20 an optical parameter, e.g. the wavelength or the state of polarization of the signal, on the basis of the detected intensities. For this evaluation the invention uses the perception that the detected intensities are correlated to a vector, preferably the Stokes vector, describing the optical parameter, e.g. the state of polarization, by a certain matrix. Since it is possible to built up this matrix for a
25 certain position dependency of the polarization properties of the manipulation step and since it is possible to invert this matrix it is also possible to derive the vector, preferably the Stokes vector from the detected intensities. For this purpose it is preferred to detect intensities in four different parts of the beam

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

to be able to derive all four vector elements of the vector, preferably the Stokes vector, unambiguously at once. If only three different parts are detected then the vector, preferably the Stokes vector, cannot be fully determined and a priori information, for example about the DOP can help to derive the complete vector,
5 preferably the Stokes vector.

In a preferred embodiment of the invention the manipulation of the beam is done by retarding the beam, the retardation being dependent of the position in the beam laterally with respect to a direction of propagation of the beam during retardation, and polarizing the beam using a known polarization. With this
10 combination the inventive manipulation step can be realized very easily. Moreover, if the beam is provided with a known wavelength, it is possible in a preferred embodiment to evaluate as an optical parameter the state of polarization of the signal.

Preferably, the polarization properties of the manipulation step are a linear
15 function of the position in the beam. Moreover, it is preferred that the retardation is a linear function of the position in the beam. Additionally, it is preferred that the detection being a non-linear function of the position in the beam. In other preferred embodiments the spatially linear variation (and even nonlinear variations) of the retardation may be caused by other means, for
20 example by using liquid or ferroelectric crystals and by applying an electric field to these elements.

A separate aspect of the invention for which aspect is claimed independent protection, also, is an element for manipulating an optical signal which comprises at least two sub-elements, each of these sub-elements having a
25 variation in their polarization manipulation property along one of its axes and these axes have some angle with respect to each other. Preferably each of the sub-elements is a retardation element. More preferred, each of the sub-elements has the shape of a wedge.

June 5, 2001

Agilent Technologies

Our Ref.: 20010465

In a further embodiment of the above-mentioned invention the manipulation element can comprise such an element, also.

If the beam is provided with a known state of polarization it is possible within a preferred embodiment to evaluate as an optical parameter the wavelength of the signal, i.e. to provide a wavelength sensor or wavemeter.

In another preferred embodiment of the invention the wedge-shaped retardation plates are positioned in the path of the beam such that their axes of the extraordinary index of refraction have some angle with respect to each other, preferably an angle not equal to 45° , 135° , 225° , 315° . This choice of angles as well as the choice of the appropriate retardation guarantees that all Stokes parameters can be determined unambiguously. Other arrangements with crystals having different birefringent properties may also ensure that all Stokes parameters can be determined unambiguously.

An advantage of the present invention is therefore the provision of a method and an apparatus which provide high precision measurement of the optical parameter with an apparatus having a small number of parts, in particular of a low cost, small form factor and high precision wavelength sensor and a low cost and high precision polarimeter without the need for using a large number of different parts which have to be adjusted with respect to each other.

In a preferred embodiment of the invention the wavelength sensor is realized by splitting the beam into a first and a second beam, providing the first beam with a known first polarization, providing the second beam with a known second polarization, detecting the intensities of the first and the second beam in their dependence on the position in the beam laterally with respect to a direction of propagation of the beam, and evaluating as an optical parameter the wavelength of the initial beam. Therefore, this embodiment makes it possible to evaluate the wavelength of a beam just by using the inventive manipulation

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

and detection facilities that are dependent on the position in the beam.

Another preferred embodiment of the invention combines the wavelength sensor with the polarization sensor. The incident light of unknown wavelength and unknown state of polarization is split into three beams. Two of these
5 beams are used to prepare well-defined states of polarization for a wavelength measurement. The third beam is used to determine the state of polarization. The parallel measurement of wavelength and state of polarization, which is made possible by this part of the invention, enables to "compensate" for the wavelength dependence of an arrangement for measuring the state of
10 polarization. This presents a considerable advantage. Many of the possible expansions described below also apply here, especially the fact that all three beams may be steered such that they pass through or directed to the same optical devices such as retarders and polarizers.

In another example of the invention the evaluating of the optical parameter is
15 done by describing the effect of the manipulation step with the help of a matrix, by inverting the matrix and by multiplying the vector of the detected intensities with the inverted matrix to get the Stokes parameters of the optical signal. In this respect it is preferred to find the matrix by performing a calibration procedure for determination of each matrix element. This calibration procedure
20 can be done by using several defined states of polarization for the initial beam so that by the detected intensities the effect of the manipulating step can be evaluated and therefore the matrix elements can be evaluated. Another possibility for calibration is to use unknown states of polarization of the initial beam but fully polarized ($DOP = 1$) initial beams, using a first approximation for
25 the matrix and then using known methods for searching the gradient of the real matrix of the manipulation step.

Other preferred embodiments are shown by the dependent claims.

Agilent Technologies

June 5, 2001

Our Ref.: 20010465

It is clear that the invention can be partly embodied or supported by one or more suitable software programs, which can be stored on or otherwise provided by any kind of data carrier, and which might be executed in or by any suitable data processing unit.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects and many of the attendant advantages of the present invention will be readily appreciated and become better understood by reference to the following detailed description when considering in connection with the accompanied drawings. The components in the drawings are not necessarily
10 to scale, emphasis instead being placed upon clearly illustrating the principles of the present invention. Features that are substantially or functionally equal or similar will be referred to with the same reference sign(s).

Fig. 1 shows a first embodiment of the present invention;

Fig. 2 shows a second embodiment of the present invention; and

15 Fig. 3 shows a third embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

Referring now in greater detail to the drawings, Fig. 1 shows a first embodiment 1 of the present invention. Embodiment 1 realizes a polarimeter and uses two optical retardation plates 2 and 4 and a linear polarizer 6 to achieve a position-
20 dependent retardation and thus a polarization-sensitive intensity variation across the diameter of an expanded preferably parallel beam 8 originating from a laser source 10. This variation is detected in the different segments of a four-quadrant detector 12. From the different intensities measured, it is possible to
25 of the incident light, assuming that its wavelength is known. This determination

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

is done with the help of the above-referenced inverted matrix.

In embodiment 1 there are used birefringent optical retardation plates 2 and 4 which have nonparallel planar surfaces. For this purpose plates 2 and 4 are shaped like a wedge. This causes a linear variation of the retardation across the plates 2, 4. To detect all states of polarization unambiguously with the single four-quadrant detector 12, the two retarders 2, 4 are positioned in the path of the beam 8 such that their axes of the extraordinary index of refraction (uniaxial direction, in the plane of the plates) have some angle with respect to each other.

Fig. 2 shows a second embodiment 100 of the present invention. Embodiment 100 realizes a wavelength sensor. In embodiment 100 the incident light originating from a laser source 102 is expanded into a preferably parallel beam 104 and then separated into two beams 106 and 108 by means of a polarizing beam splitter 110 and deflecting means 112, e.g. a mirror or a beam steering prism. Subsequently, polarization means 114 and 116 are used to create two well-defined states of polarization, e.g. horizontal (H) and vertical (V). Alternatively (not shown), a non-polarizing beam splitter may be used and the two different states of polarization are solely created by the polarization means. In some cases, even the polarization created by the polarizing beam splitter may be sufficient. Here are used two different but well-defined states of polarization to provide a sufficiently strong signal on one channel in those situations where the signal of the other channel vanishes, respectively, due to polarizer extinction. Also, favorable states of polarization are chosen such that the largest possible signal variations (dynamic range) further down the beam path (at the detectors, see below) are obtained.

After the polarization means 114 and 116, the two beams 106 and 108 pass an arrangement of two retardation plates 118 and 120. As in the embodiment of Fig. 1, these plates 118 and 120 have planar but nonparallel surfaces.

Agilent Technologies

June 5, 2001

Our Ref.: 20010465

Therefore, they exhibit a linearly varying retardation across their diameter. The optical axes (of birefringence) of the plates 118 and 120 are in the plane of the retardation plates 118 and 120 and are aligned under some angle. The purpose of this arrangement is to manipulate the states of polarization of the two (expanded) beams 106 and 108 in a controlled and spatially varying fashion. Both parallel beams 106, 108 pass through the same retardation plates 118, 120 in different areas, thus using them in an economic fashion.

After the retardation plates 118, 120, the light of the beams 106, 108 passes through a linear polarizer 122 and hits the different segments of four-quadrant detectors 124 and 126. A single polarizer 122 is used for both beams 106, 108. The wavelength information is then derived from the signal intensities registered in the different segments of both detectors 124, 126 with the help of the above mentioned inverted matrix.

With embodiment 100 light of unknown wavelength and state of polarization is prepared with defined states of polarization in order to obtain the wavelength information alone. In embodiment 1 this is not possible with an unknown wavelength, because the phase shift in the retarder plates 2, 4 depends on both, wavelength and state of polarization. In embodiment 100 it is achieved a separation of these two effects and therefore it is possible to obtain information on a single quantity, i.e. the wavelength.

Similar information may also be obtained with a single four-quadrant detector (not shown) when using a switching or other appropriate beam steering means, that allows one to subsequently hit the detector area with one or the other of the two beams 106, 108, possibly e.g. in a periodically oscillating fashion. Other position-sensitive detectors, like arrays, may also be used in order to detect the signals from the two beams 106, 108, either in parallel or sequentially. The use of four quadrants is driven by the minimum number of independent information channels that give the complete unambiguous information about all four

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

parameters describing a polarization state. More detectors may be used as well.

In addition, the wavelength sensor of the second embodiment 100 can be combined with the polarization sensor of the first embodiment 1 in order to measure both, the wavelength and the complete state of polarization of the incident light beam in one instrument. This instrument is shown in the third embodiment 200 according to Fig. 3. The incident light 202 of a laser source 204 of unknown wavelength and state of polarization is split into three beams 206, 208, 210. Beams 206 and 208 are used to prepare well-defined states of polarization for a wavelength measurement. The third beam 210 is used to determine the state of polarization. In embodiment 200 all three beams 206, 208, 210 are steered such that they pass through the same retarders 212, 214 and polarizer 216. At the end the beams 206, 208, 210 hit three four-quadrant detectors 218, 220 and 222. The evaluation of wavelength and state of polarization is done with the help of the above-mentioned inverted matrix, similarly to the determination as in the other embodiments 1, 100.

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

Agilent Technologies

June 5, 2001

Our Ref.: 20010465

EPO - Munich
52

CLAIMS:

07. Juni 2001

1. A method of determination of at least one optical parameter of an optical signal, comprising the steps of:
- manipulating a beam (8, 104, 106, 108, 202, 206, 208, 210) of the optical signal, the manipulation having polarization properties, the properties being dependent of the position in the beam (8, 104, 106, 108, 202, 206, 208, 210) laterally with respect to a direction of propagation of the beam (8, 104, 106, 108, 202, 206, 208, 210) during manipulation,
 - detecting intensities in at least three parts of the beam (8, 104, 106, 108, 202, 206, 208, 210) in their dependency of the position in the beam (8, 104, 106, 108, 202, 206, 208, 210) laterally with respect to a direction of propagation of the beam (8, 104, 106, 108, 202, 206, 208, 210) during detection,
 - evaluating the optical parameter on the basis of the detected intensities.
2. The method of claim 1, wherein the manipulation comprises the manipulation of the power transmission of at least a part of the beam (8, 104, 106, 108, 202, 206, 208, 210), the manipulation of the power transmission being dependent of the position in the beam (8, 104, 106, 108, 202, 206, 208, 210) laterally with respect to a direction of propagation of the beam (8, 104, 106, 108, 202, 206, 208, 210) during manipulation of the power transmission, and being dependent of the polarization of said part of the beam (8, 104, 106, 108, 202, 206, 208, 210).
3. The method of any one of the claims 1-2, further comprising the steps of:
- manipulating the beam (8, 104, 106, 108, 202, 206, 208, 210) by:
 - retarding the beam (8, 104, 106, 108, 202, 206, 208, 210), the retardation being dependent of the position in the beam (8, 104, 106, 108, 202, 206, 208, 210) laterally with respect to a direction of propagation of

June 5, 2001

Agilent Technologies

Our Ref.: 20010465

the beam (8, 104, 106, 108, 202, 206, 208, 210) during retardation,
- polarizing the beam (8, 104, 106, 108, 202, 206, 208, 210) using a
known polarization.

4. The method of any one of the claims 1-3, further comprising the steps of:
5 - providing the beam (8, 104, 106, 108, 202, 206, 208, 210) with a known
wavelength,
- evaluating as an optical parameter the state of polarization of the signal.
5. The method of any one of the claims 1-4, further comprising the steps of:
10 - providing the beam (8, 104, 106, 108, 202, 206, 208, 210) with a known
state of polarization,
- evaluating as an optical parameter the wavelength of the signal.
6. The method of any one of the claims 1-5, further comprising the steps
of:
15 - splitting the beam (104, 202) in a first (106, 108, 206, 208, 210) and
at least a second beam (106, 108, 206, 208, 210),
- providing the first beam (106, 108, 206, 208, 210) with a known first
polarization before manipulating,
- providing the second beam (106, 108, 206, 208, 210) with a known
second polarization before manipulating,
20 - detecting the intensity of the first beam (106, 108, 206, 208, 210) in
its dependence on the position in the first beam (106, 108, 206, 208,
210) laterally with respect to a direction of propagation of the first beam
(106, 108, 206, 208, 210) during detection,
- detecting the intensity of the second beam (106, 108, 206, 208, 210)
25 in its dependence on the position in the second beam (106, 108, 206,
208, 210) laterally with respect to a direction of propagation of the
second beam (106, 108, 206, 208, 210) during detection,
- evaluating as an optical parameter the wavelength of the beam (8,

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

104, 106, 108, 202, 206, 208, 210).

7. The method of any one of the claims 1–6, further comprising the steps of:
- evaluating the optical parameter by:
 - describing the effect of the manipulation step with the help of a matrix,
 - 5 - inverting the matrix,
 - multiplying the detected intensities with the inverted matrix to get the Stokes parameters for the optical signal.
8. The method of any one of the claims 1–7,
- 10 wherein the dependence of the properties of the manipulation from the position in the beam (8, 104, 106, 108, 202, 206, 208, 210) being sufficient to make the matrix invertible.
9. The method of anyone of the claims 1–8,
- wherein the detection being a detection of four different parts of the beam (8, 104, 106, 108, 202, 206, 208, 210).
- 15 10. The method of anyone of the claims 1–9, further comprising the steps of:
- splitting the beam (202) in a first (206), a second (208) and a third beam (210),
 - providing the first beam (206) with a known first polarization before manipulation,
 - 20 - providing the second beam (208) with a known second polarization before manipulation,
 - detecting the intensity of the first beam (206) in its dependence on the position in the first beam (206) laterally with respect to a direction of propagation of the first beam (206) during detection,
 - 25 - detecting the intensity of the second beam (208) in its dependence on the position in the beam (208) laterally with respect to a direction of propagation of the second beam during detection,

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

- detecting the intensity of the third beam (210) in its dependence on the position in the beam (210) laterally with respect to a direction of propagation of the third beam (210) during detection,
 - evaluating as an optical parameter the wavelength of the beam (202) on the basis of the detected intensities of the first (206) and the second beam (208),
 - evaluating as an optical parameter the state of polarization of the beam (202) on the basis of the detected intensity of the third beam(210).
11. A software program or product, preferably stored on a data carrier, for executing the method of one of the claims 1 to 10 when run on a data processing system such as a computer.
12. An apparatus for determination of at least one optical parameter of an optical signal, comprising:
- an element (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) in a path of a beam (8, 104, 106, 108, 202, 206, 208, 210) of the optical signal for manipulating the beam (8, 104, 106, 108, 202, 206, 208, 210), the manipulation having polarization properties, the properties being dependent on the position in the beam (8, 104, 106, 108, 202, 206, 208, 210) laterally with respect to a direction of propagation of the beam (8, 104, 106, 108, 202, 206, 208, 210)during the manipulation,
 - a detector element (12, 124, 126, 218, 220, 222) in the path for detecting the intensities in at least three parts of the beam (8, 104, 106, 108, 202, 206, 208, 210) in their dependency on the position in the beam (8, 104, 106, 108, 202, 206, 208, 210) laterally with respect to a direction of propagation of the beam (8, 104, 106, 108, 202, 206, 208, 210) during detection,
 - an evaluating unit connected to the detector element (12, 124, 126, 218,

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

220, 222) for evaluating the optical parameter on the basis of the detected intensities.

13. The apparatus of claim 12, the element further comprising:

5 - at least one retardation element (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) in the path, the retardation of the retardation element (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) being a function of the position in the beam laterally with respect to a direction of propagation of the beam (8, 104, 106, 108, 202, 206, 208, 210) during retardation,

10 - at least one polarization element (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) in the path with a known polarization effect on the signal.

14. The apparatus of any one of the claims 12 or 13, wherein the retardation element (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) comprises at least two retardation plates (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) in the path, the retardation being a linear
15 function of the position in the beam (8, 104, 106, 108, 202, 206, 208, 210).

15. The apparatus of any one of the claims 12–14,
 - wherein at least one of the retardation plates (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) has non-parallel surfaces.

20 16. The apparatus of any one of the claims 12–15,
 - wherein the retardation plates (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) are positioned in the path such that their axes of the extraordinary index of refraction have some angle with respect to each other.

25 17. The apparatus of any one of the claims 12–16, further comprising:
 - a first beam splitter (110) in the path between the light source (102) and

June 5, 2001

Agilent Technologies

Our Ref.: 20010465

the element (114, 116, 118, 120, 122) for providing a first beam (106) traveling a first path and a second beam (108) traveling a second path,
- a first polarization element (114, 118, 120) in the first path for providing the first beam with a known polarization,
5 - a second polarization element (116, 118, 120) in the second path for providing the second beam with a known second polarization,
- the detector element (124, 126) being in the path of the first and of the second polarized beam for detecting the intensity of the beam (104) in its dependency of the position in the beams laterally with respect to a
10 direction of propagation of the beams during detection.

18. The apparatus of any one of the claims 12–17, further comprising:

- a first and a second beam splitter in the path between the light source (204) and the element (212, 214, 216) for splitting the beam (202) in a first beam (206) traveling a first path, a second beam (208) traveling a
15 second path and a third beam (210) traveling a third path,
- a first polarization element in the first path for providing the first beam (206) with a known first polarization,
- a second polarization element in the second path for providing the second beam (208) with a known second polarization,
20 - the detector element (218, 220, 222) being in the paths of the first (206), the second (208) and the third beam (210) for detecting the intensities of the beams (202, 204, 206, 210) in their dependency of the position in the respective beam (202, 206, 208, 210) laterally with respect to a direction of propagation of the respective beam (202, 206,
25 208, 210) during detection,
- the evaluating unit being able for evaluating as an optical parameter the wavelength of the beam (202, 206, 208, 210) on the basis of the detected intensities of the first (206) and the second beam (208) and being able to evaluate the state of polarization of the beam (202) on the

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**

basis of the detected intensities of the third beam (210).

19. An element for manipulating an optical signal,

comprising at least two sub-elements (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216), each having at least one body axis, each of these sub-
5 elements (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) having a variation in a manipulation property along its axis and these axes have some angle with respect to each other.

20. The element of claim 19,

the manipulation property of the sub-elements (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) comprising a polarization manipulation property
10 for manipulating the state of polarization of at least a part of the optical signal.


21. The element of claims 19 or 20,

the sub-elements (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) comprising retardation sub-elements (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) for retardation of the optical signal.
15

22. The element of any one of the claims 19-21,

the sub-elements (2, 4, 6, 114, 116, 118, 120, 122, 212, 214, 216) having the shape of a wedge.

20 23. The apparatus of any one of the claims 12-18, wherein the element comprises an element according to any one of the claims 19-22.

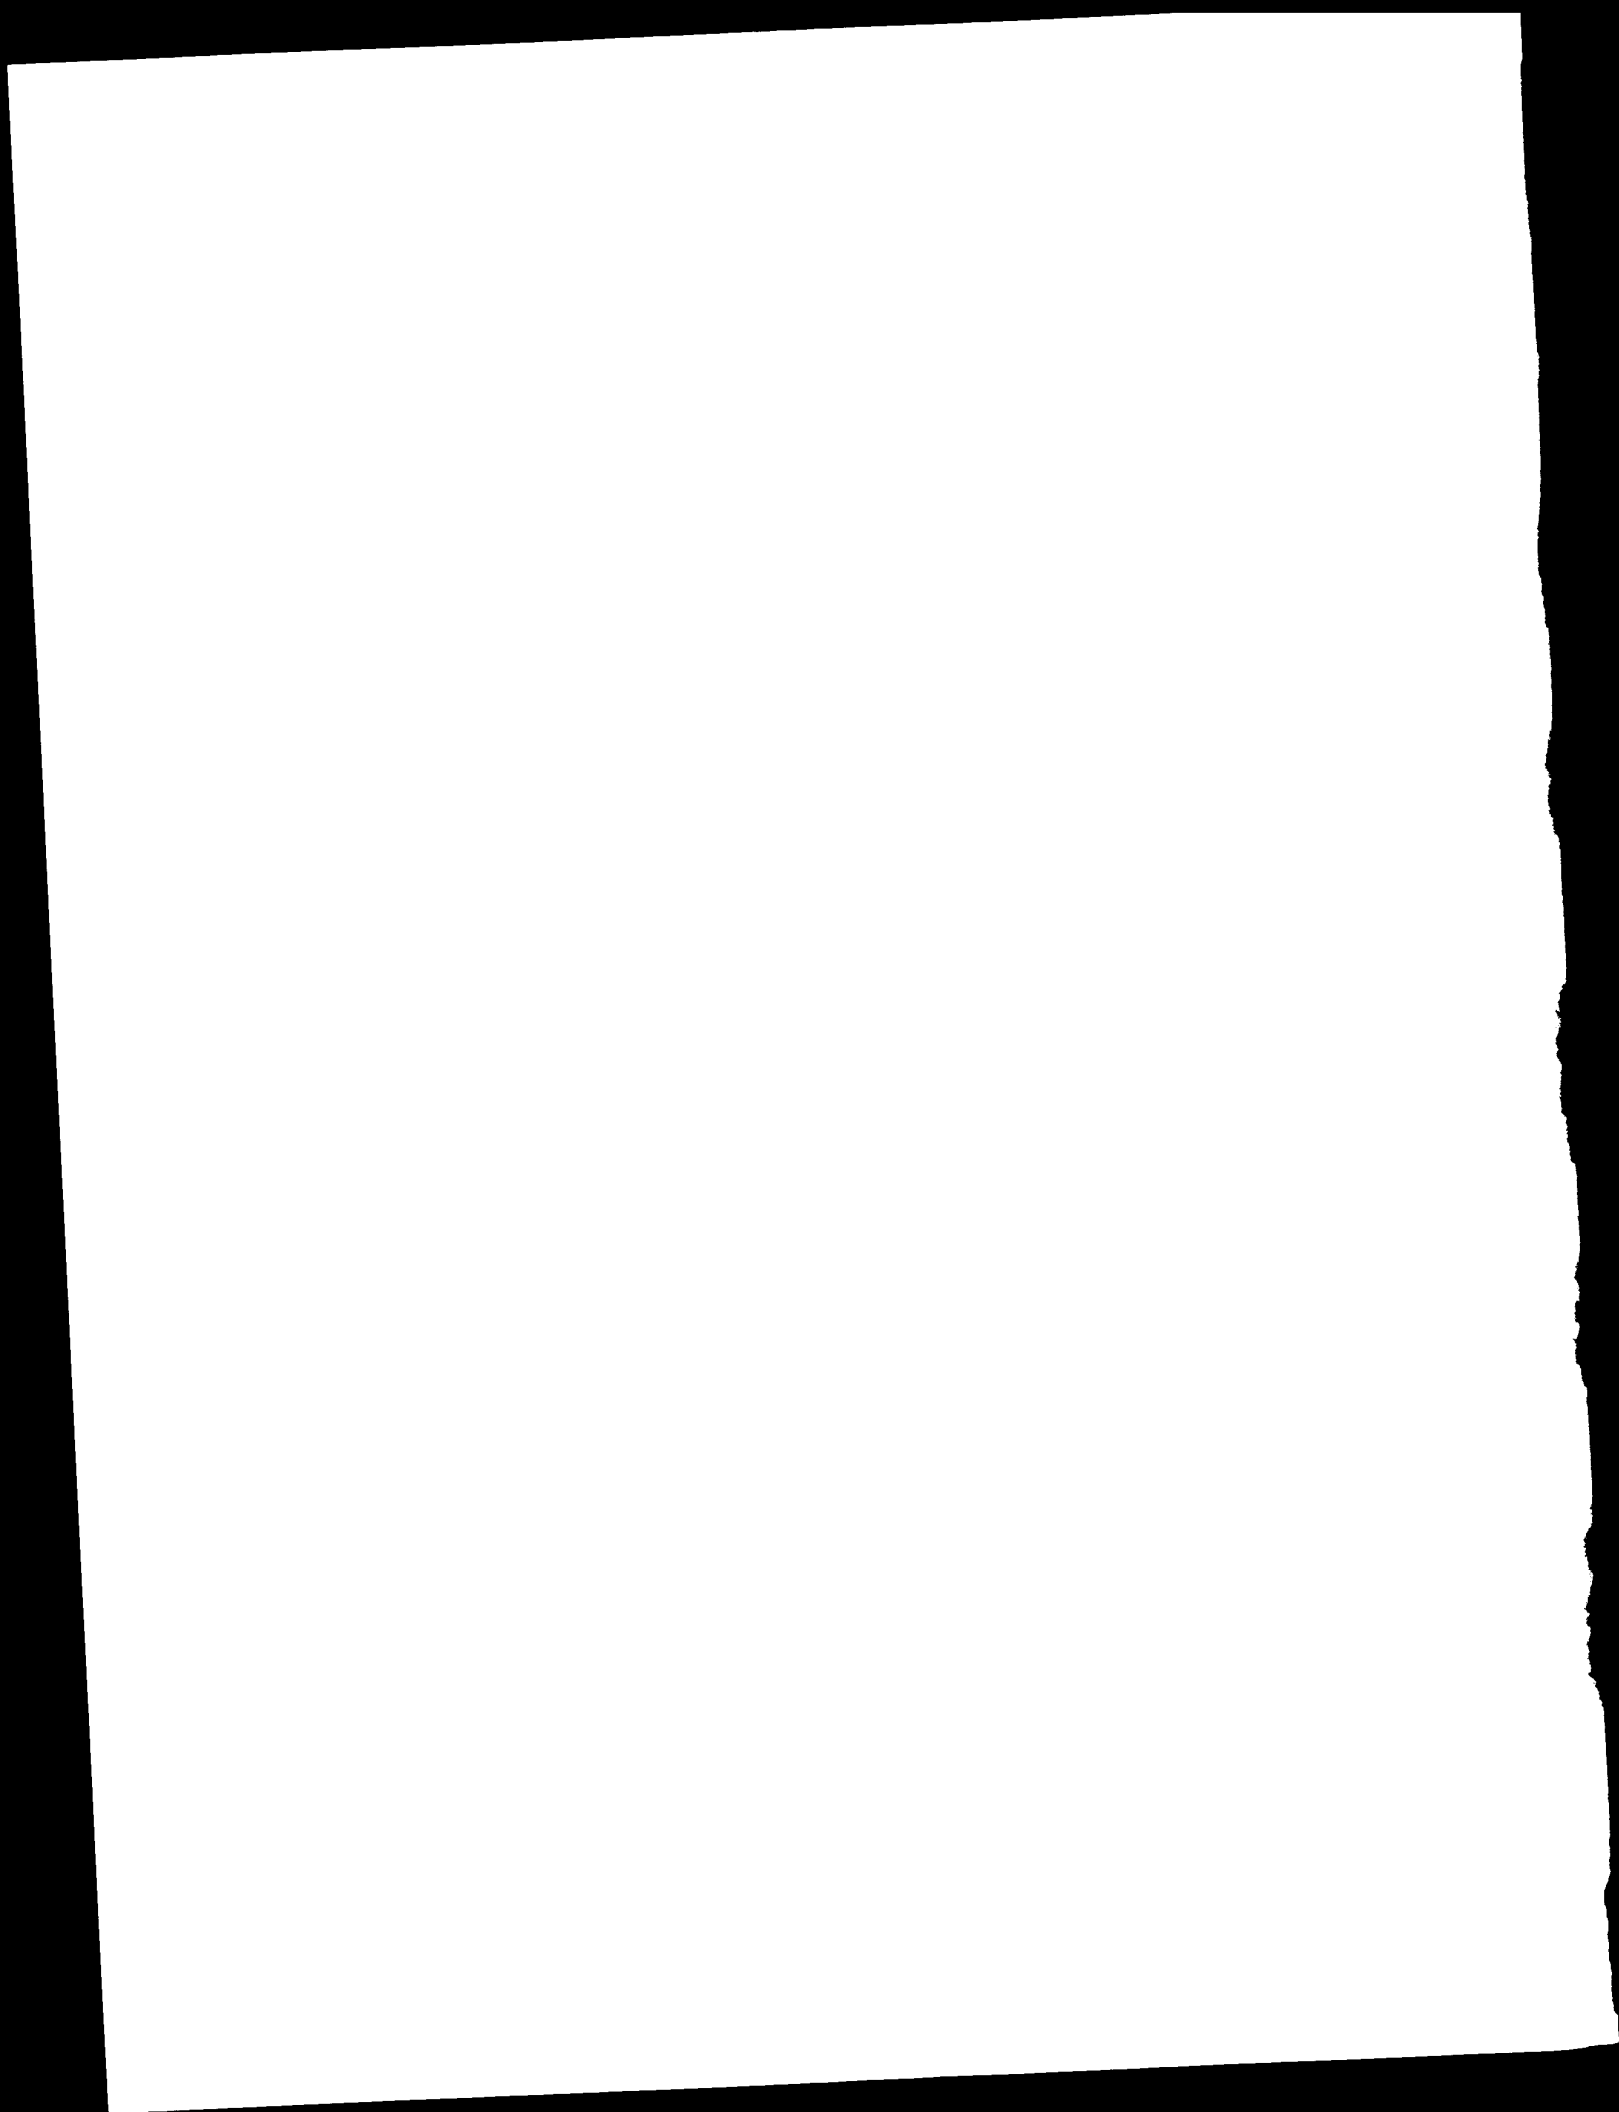

Agilent Technologies**June 5, 2001****Our Ref.: 20010465**EPO-Munich
52**07. Juni 2001****ABSTRACT**

The invention relates to an apparatus and a method of determination of at least one optical parameter of an optical signal, comprising the steps of: providing a beam of the optical signal having a diameter, manipulating the beam, the manipulation having polarization properties, the properties being dependent of the position in the beam laterally with respect to a direction of propagation of the beam during manipulation, detecting in intensities at least three parts of the beam in their dependence of the position in the beam laterally with respect to a direction of propagation of the beam during detection.

10 [Fig. 1 for publication]

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000

07. Juni 2001

1/2

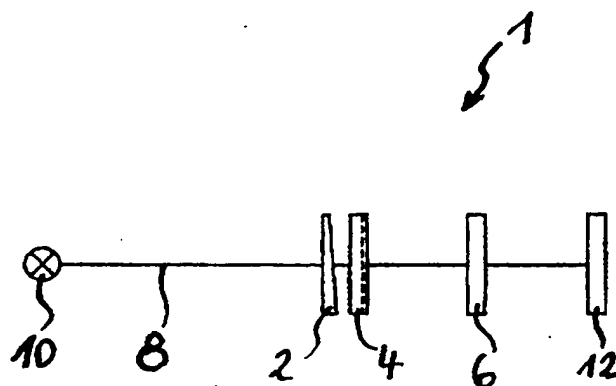


Fig. 1

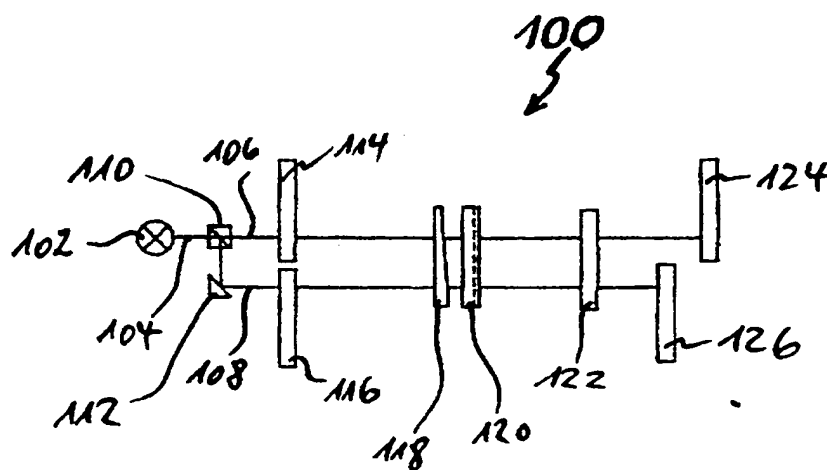


Fig. 2

2/2

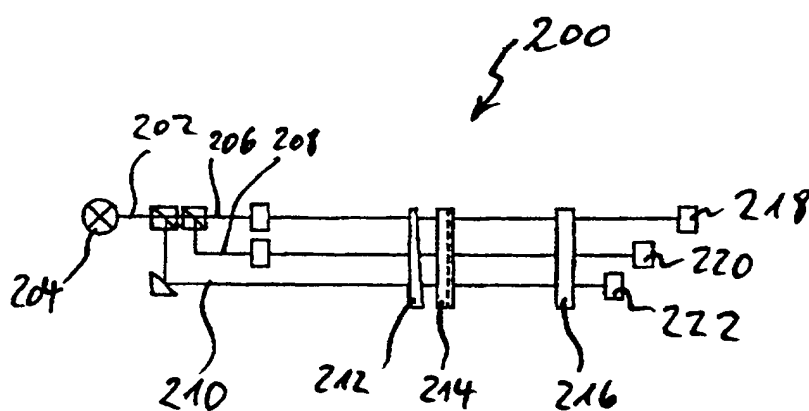


Fig. 3